




EJ Series Electronic Torque Wrench

- Accuracy: CW±2%, CCW±3% from 10% to 100% of capacity.
- Display range: 2% to 110% of maximum torque value.
- Units: Lbft, Lbin, Nm.
- Modes: Peak Torque mode, Track mode.
- Target torque can be set.
- LED light and buzzer alarming when reaches target torque.
- Automatic zero clearing when used continuously.
- Optional backlight, good for dark working condition.
- Torque error% display function.
- Battery level display.
- Automatically shut off after 2 minutes of non use.
- 3 Pcs AAA batteries, easy replacement.



Backlight Display

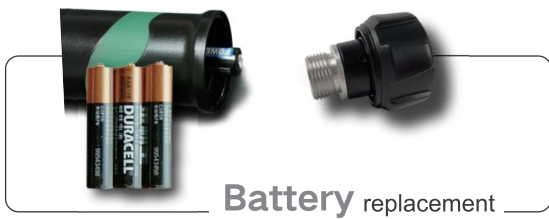

- ✓ 100% (Battery level)
- ⊖ (Less than the required torque)
- ⊕ (The required torque is exceeded)
- ⊖ (Track mode)
- ⊕ (Error%)
- ⊖ (The required torque is achieved)

EJM Model Reversible Ratchet Head Torque Wrench

Both directions, 8° swing suitable for confined space

EJ Model (English Unit)



Metric

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJM120	1/4"	2-20	17.7-177*	427	38	0.88
EJM230	3/8"	3-30	26.6-266*	427	38	0.88
EJM250	3/8"	5-50	44.3-443*	452	38	0.93
EJM2100	3/8"	10-100	7.4-73.8	482	38	1
EJM3200	1/2"	20-200	14.8-148	522	40	1.12
EJM3300	1/2"	30-300	22.1-221	590	40	1.27
EJM4400	3/4"	40-400	29.5-295	795	57	3.3
EJM4600	3/4"	60-600	44.3-443	1050	60	4.6
EJM4800	3/4"	80-800	59.0-590	1250	60	5.2
EJM41000	3/4"	100-1000	73.8-738	1250	60	5.2

*Unit is Lb.in

English

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJ1200	1/4"	20-200*	2.3-22.6	427	28	0.88
EJ2250	3/8"	25-250*	2.8-28.2	427	38	0.88
EJ2450	3/8"	45-450*	5.1-50.8	452	38	0.88
EJ2100	3/8"	10-100	13.5-135	482	38	1
EJ3150	1/2"	15-150	20.3-203	522	40	1.12
EJ3250	1/2"	25-250	33.9-339	590	40	1.27

*Unit is Lb.in

EJMH Model Rectangular Shank Head Holder Torque Wrench

For rectangular shank head inserts

EJH Model (English Unit)



Metric

Item No.	Shank Size mm	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJMH920	9x12	2-20	17.7-177*	399	24	0.82
EJMH930	9x12	3-30	26.6-266*	399	24	0.82
EJMH950	9x12	5-50	44.3-443*	423	24	0.87
EJMH9100	9x12	10-100	7.4-73.8	453	24	0.93
EJMHI4200	14x18	20-200	14.8-148	506	32	1.08
EJMHI4300	14x18	30-300	22.1-221	575	32	1.25
EJMHI4400	14x18	40-400	29.5-295	780	32	3.1
EJMHI4600	24x32	60-600	44.3-443	1050	56	4.4
EJMHI24800	24x32	80-800	59-590	1250	56	5
EJMHI241000	24x32	100-1000	73.8-738	1250	56	5

*Unit is Lb.in

English

Item No.	Shank Size mm	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJH9200	9x12	20-200*	2.3-22.6	399	24	0.82
EJH9250	9x12	25-250*	2.8-28.2	399	24	0.82
EJH9450	9x12	45-450*	5.1-50.8	423	24	0.87
EJH9100	9x12	10-100	13.6-136	453	24	0.93
EJHI4150	14x18	15-150	20.3-203	506	32	1.08
EJHI4250	14x18	25-250	33.9-339	575	32	1.25

*Unit is Lb.in

EJMBQL Model Teardrop Ratchet Head Torque Wrench

Both directions, easily operated reverse lever

EJBQL Model (English Unit)



Metric

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJMBQL120	1/4"	2-20	17.7-177*	401	25	0.87
EJMBQL230	3/8"	3-30	26.6-266*	407	33	0.89
EJMBQL250	3/8"	5-50	44.3-443*	447	33	0.99
EJMBQL2100	3/8"	10-100	7.4-73.8	477	33	1.05
EJMBQL3200	1/2"	20-200	14.8-148	529	40.5	1.15
EJMBQL3300	1/2"	30-300	22.1-221	597	40.5	1.26
EJMBQL4400	3/4"	40-400	29.5-295	700	64	2.9
EJMBQL4600	3/4"	60-600	44.3-443	1050	64	4.6
EJMBQL4800	3/4"	80-800	59.0-590	1250	64	5.2
EJMBQL41000	3/4"	100-1000	73.8-738	1250	64	5.2

*Unit is Lb.in

English

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJBQL1200	1/4"	20-200*	2.3-22.6	401	25	0.87
EJBQL2250	3/8"	25-250*	2.8-28.2	407	33	0.89
EJBQL2450	3/8"	45-450*	5.1-50.8	447	33	0.99
EJBQL2100	3/8"	10-100	13.5-135	477	33	1.05
EJBQL3150	1/2"	15-150	20.3-203	529	40.5	1.15
EJBQL3250	1/2"	25-250	33.9-339	597	40.5	1.26

*Unit is Lb.in

100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

